

SUBWOOFERS

SUB 12


Technical Sheet



SPECIFICATIONS

Nominal power	300W RMS
Maximum power	600W
Sensitivity	88dB
Nom. impedance	4 Ω
Cone	Polypropylene
Surround	Butyl
VC diameter	50mm 2"
Net weight	5.5kg

FREQUENCY RESPONSE/IMPEDANCE

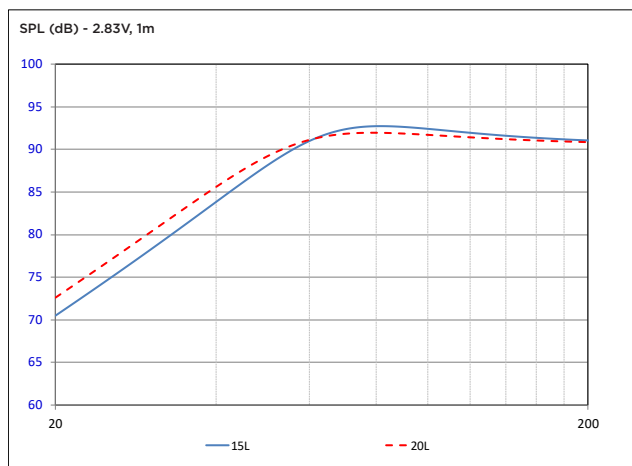

PARAMETERS

Rdc	3 Ω
Fs	24Hz
Mms	150g
Cms	0.29mm/N
Vas	90L
Qts	0.484
Qes	0.442
Qms	5.146
Bxl	12 N/A
Sd	471cm ²

MECHANICAL DRAWING

